


How to Enable POP/IMAP in Wildcat Mail and Settings to Use for a POP/IMAP Client

How to enable POP/IMAP in Wildcat Mail

1. Log into Wildcat Mail in a web browser through the eWeber portal or by going to <http://wildcat.mail.weber.edu> and entering a Wildcat user name and password
2. Click the Settings icon and select **Mail settings**

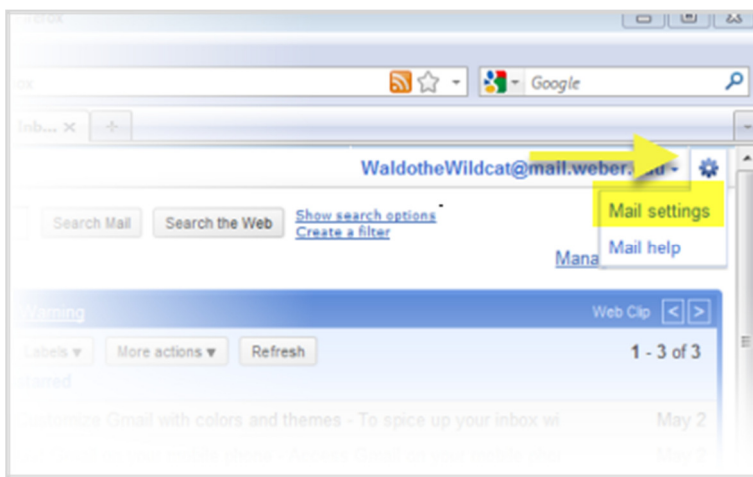

3. Click the **Forwarding and POP/IMAP** tab
4. In **IMAP Access** click **Enable IMAP**
-or-
In **POP Download** click **Enable POP for all mail** or **Enable POP for mail that arrives from now on**
5. Choose additional options as desired and click **Save Changes**

Settings for an IMAP client (see below for POP settings)

General Settings:

Name: User Name (*how you want your name to appear in sent messages*)

Address: UserName@mail.weber.edu (*your Wildcat email address*)

Description: *add a description*

IMAP Settings:

HostName: imap.gmail.com

User Name: UserName@mail.weber.edu (*your Wildcat email address*)

Password: *your Wildcat password*

Use SSL: On

Server Port: 993

SMTP Settings:

Host Name: smtp.gmail.com

UserName: UserName@mail.weber.edu (*your Wildcat email address*)

Password: *your Wildcat password*

Use SSL: On

Server Port: 465

TIP: All IMAP clients have similar settings but may use terms slightly different from those listed above

Settings for a POP client

POP Settings:

HostName/ServerName: pop.gmail.com

User Name: UserName@mail.weber.edu (*your Wildcat email address*)

Password: *your Wildcat password*

Use SSL: On

Server Port: 995

TIP: All POP clients have similar settings but may use terms slightly different from those listed above